

Console IDU

GEH(09)AA-D3DNA1C/I



Model			GEH(09)AA-D3DNA1C/I
Power Supply	Rated Voltage	V ~	208/230
	Rated Frequency	Hz	60
	Phases		1
Power Supply Mode			Outdoor
Cooling Capacity		Btu/h	9000
Heating Capacity		Btu/h	9500
Air Flow Volume(SH/H/MH/M/ML/L/SL)		m ³ /h	500/430/410/370/330/280/250
Dehumidifying Volume		L/h	0.8
Application Area		m ²	12-18
Indoor Unit	Fan Type		Centrifugal
	Diameter Length(DXL)	mm	Φ80X370
	Fan Motor Cooling Speed (SH/H/MH/M/ML/L/SL)	r/min	650/560/530/480/430/370/320
	Fan Motor Heating Speed (SH/H/MH/M/ML/L/SL)	r/min	650/560/530/480/430/370/320
	Output of Fan Motor	W	30
	Fan Motor RLA	A	/
	Evaporator Form		Aluminum Fin-copper Tube
	Pipe Diameter	mm	Φ6.35
	Row-fin Gap	mm	2-1.2
	Coil Length (LXDXW)	mm	511X24X396
	Swing Motor Model		MP24EB
	Output of Swing Motor	W	1.5
	Fuse	A	3.15
	Sound Pressure Level (SH/H/MH/M/ML/L/SL)	dB (A)	40/38/36/33/30/26/25
	Sound Power Level(SH/H/MH/M/ML/L/SL)	dB (A)	50/48/46/43/40/36/35
	Dimension (WXHXD)	mm	700X600X215
	Dimension of Carton Box (L/W/H)	mm	785X680X280
	Dimension of Package (L/W/H)	mm	788X695X283
	Net Weight	kg	15
	Gross Weight	kg	18
Connection Pipe	Length	m	7.5
	Outer Diameter Liquid Pipe	mm	Φ6
	Outer Diameter Gas Pipe	mm	Φ9.52


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Construction Views.

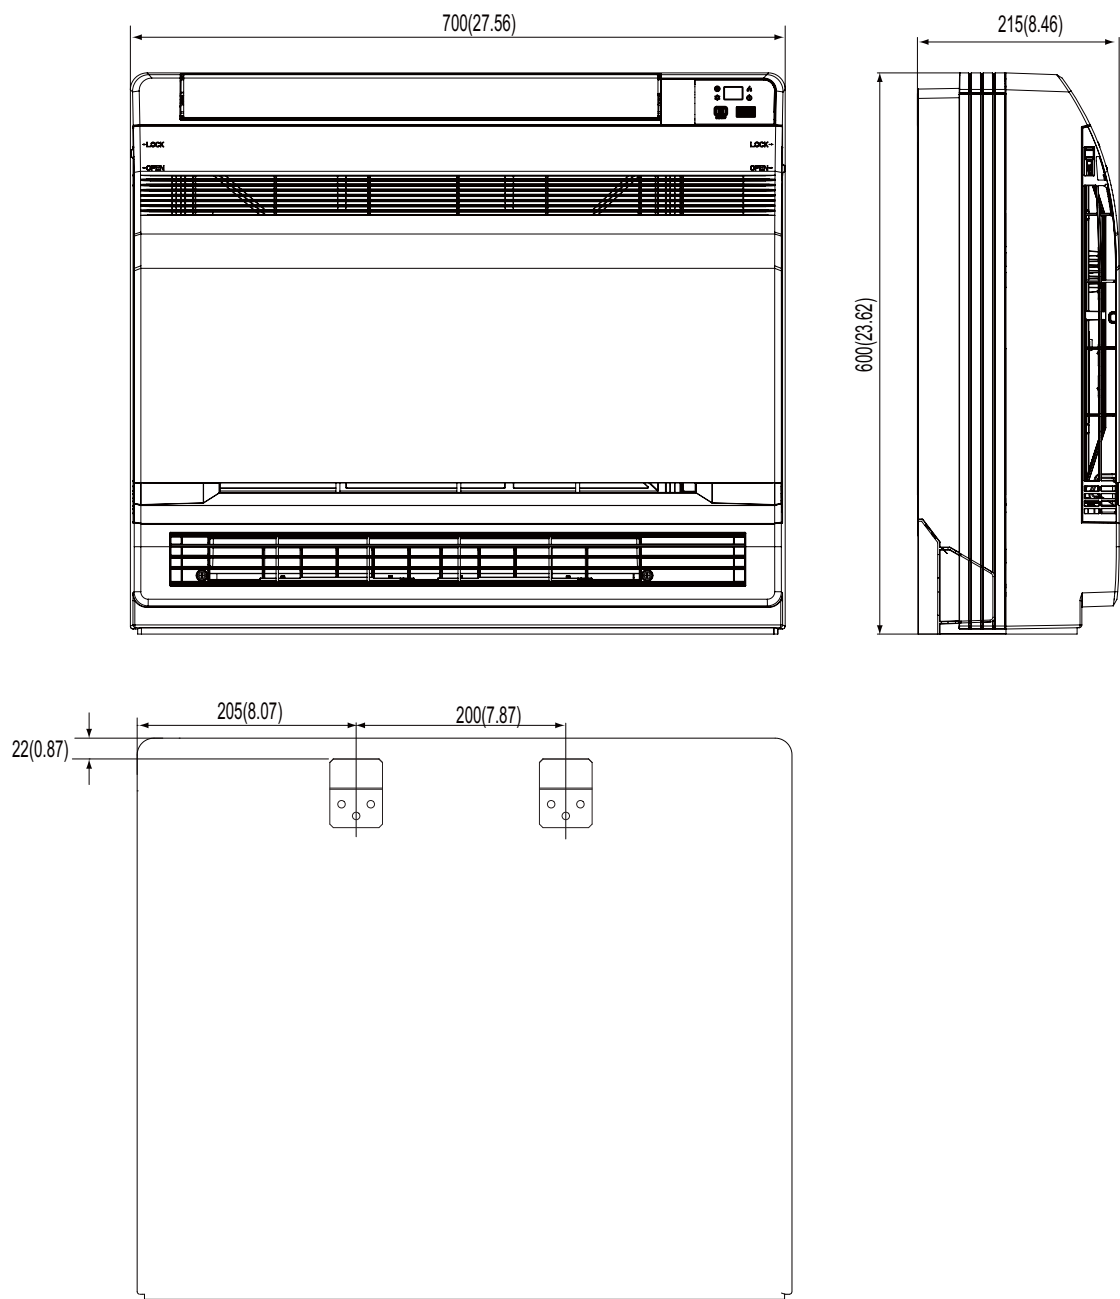

Unit:mm(inch)

Console IDU

GEH(12)AA-D3DNA1C/I



Model			GEH(12)AA-D3DNA1C/I
Power Supply	Rated Voltage	V ~	208/230
	Rated Frequency	Hz	60
	Phases		1
Power Supply Mode			Outdoor
Cooling Capacity		Btu/h	12000
Heating Capacity		Btu/h	13000
Air Flow Volume(SH/H/MH/M/ML/L/SL)		m ³ /h	600/520/480/440/400/360/280
Dehumidifying Volume		L/h	1.4
Application Area		m ²	15-22
Indoor Unit	Fan Type		Centrifugal
	Diameter Length(DXL)	mm	Φ80X370
	Fan Motor Cooling Speed (SH/H/MH/M/ML/L/SL)	r/min	750/650/600/550/500/450/350
	Fan Motor Heating Speed (SH/H/MH/M/ML/L/SL)	r/min	750/650/600/550/500/450/350
	Output of Fan Motor	W	30
	Fan Motor RLA	A	/
	Evaporator Form		Aluminum Fin-copper Tube
	Pipe Diameter	mm	Φ6.35
	Row-fin Gap	mm	2-1.2
	Coil Length (LXDXW)	mm	511X24X396
	Swing Motor Model		MP24EB
	Output of Swing Motor	W	1.5
	Fuse	A	3.15
	Sound Pressure Level (SH/H/MH/M/ML/L/SL)	dB (A)	43/40/38/37/35/32/27
	Sound Power Level(SH/H/MH/M/ML/L/SL)	dB (A)	53/50/48/47/45/42/37
	Dimension (WXHXD)	mm	700X600X215
	Dimension of Carton Box (L/W/H)	mm	785X680X280
	Dimension of Package (L/W/H)	mm	788X695X283
	Net Weight	kg	15
	Gross Weight	kg	18
Connection Pipe	Length	m	7.5
	Outer Diameter Liquid Pipe	mm	Φ6
	Outer Diameter Gas Pipe	mm	Φ9.52


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Construction Views.

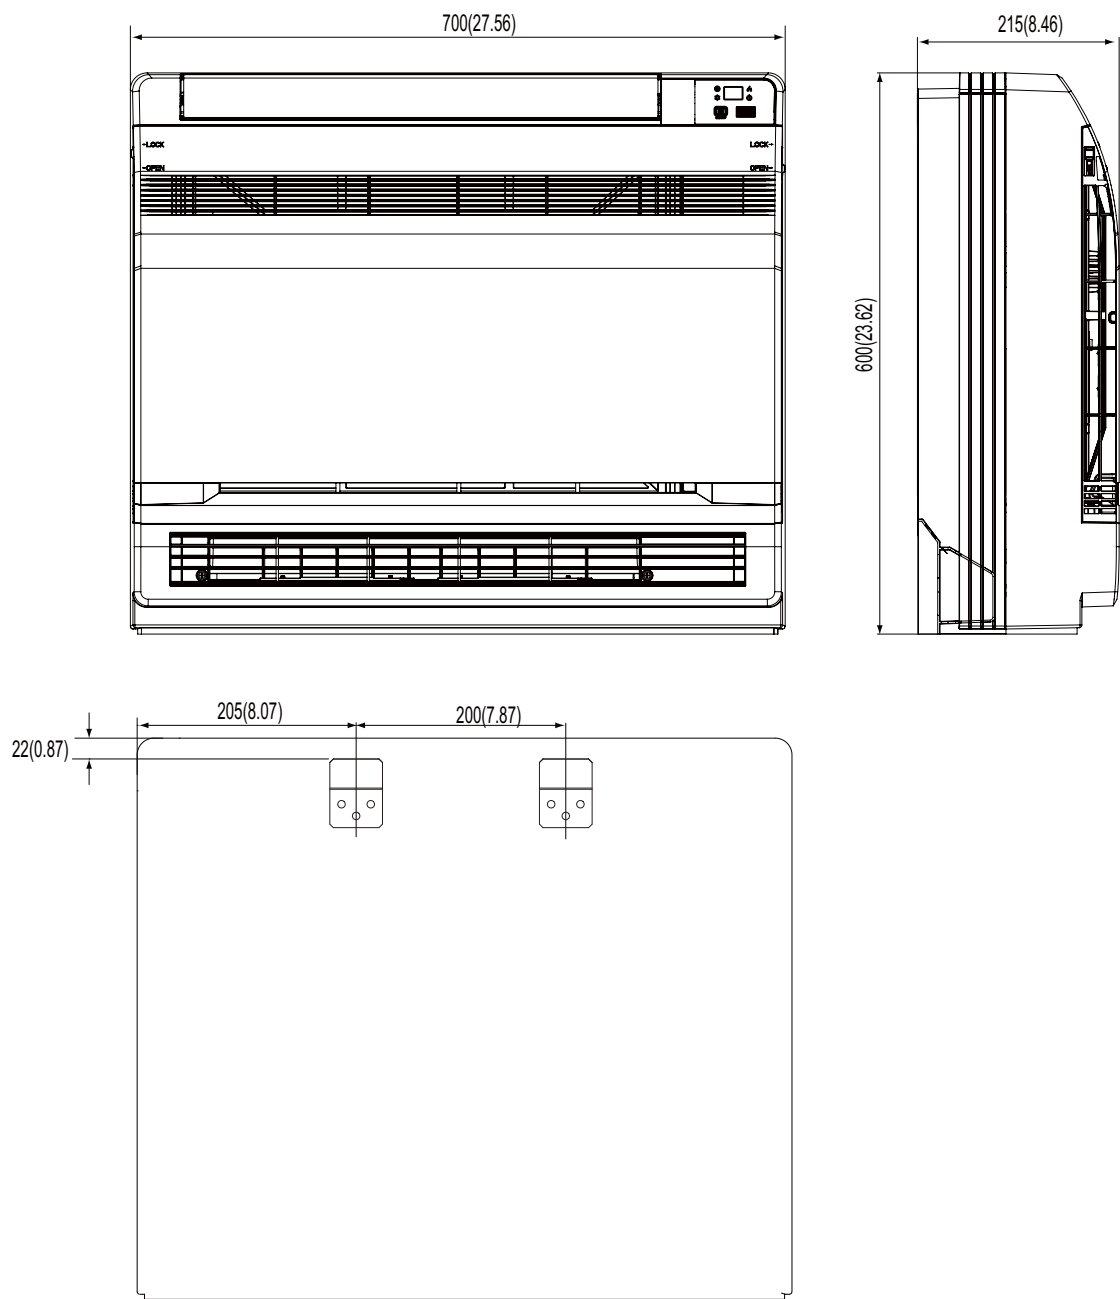

Unit:mm(inch)

Console IDU

GEH(18)AA-D3DNA1C/I



Model			GEH(18)AA-D3DNA1C/I
Power Supply	Rated Voltage	V ~	208/230
	Rated Frequency	Hz	60
	Phases		1
Power Supply Mode			Outdoor
Cooling Capacity		Btu/h	18000
Heating Capacity		Btu/h	19800
Air Flow Volume(SH/H/MH/M/ML/L/SL)		m ³ /h	650/620/550/500/450/410/320
Dehumidifying Volume		L/h	1.8
Application Area		m ²	23-34
Indoor Unit	Fan Type		Centrifugal
	Diameter Length(DXL)	mm	Φ80X370
	Fan Motor Cooling Speed (SH/H/MH/M/ML/L/SL)	r/min	840/800/720/650/580/530/410
	Fan Motor Heating Speed (SH/H/MH/M/ML/L/SL)	r/min	900/840/760/690/620/570/450
	Output of Fan Motor	W	30
	Fan Motor RLA	A	/
	Evaporator Form		Aluminum Fin-copper Tube
	Pipe Diameter	mm	Φ6.35
	Row-fin Gap	mm	2-1.2
	Coil Length (LXDXW)	mm	511X24X396
	Swing Motor Model		MP24EB
	Output of Swing Motor	W	1.5
	Fuse	A	3.15
	Sound Pressure Level (SH/H/MH/M/ML/L/SL)	dB (A)	48/46/44/41/37/35/33
	Sound Power Level(SH/H/MH/M/ML/L/SL)	dB (A)	58/56/54/51/47/45/43
	Dimension (WXHXD)	mm	700X600X215
	Dimension of Carton Box (L/W/H)	mm	785X680X280
	Dimension of Package (L/W/H)	mm	788X695X283
	Net Weight	kg	15
	Gross Weight	kg	18
Connection Pipe	Length	m	7.5
	Outer Diameter Liquid Pipe	mm	Φ6
	Outer Diameter Gas Pipe	mm	Φ12


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Construction Views.

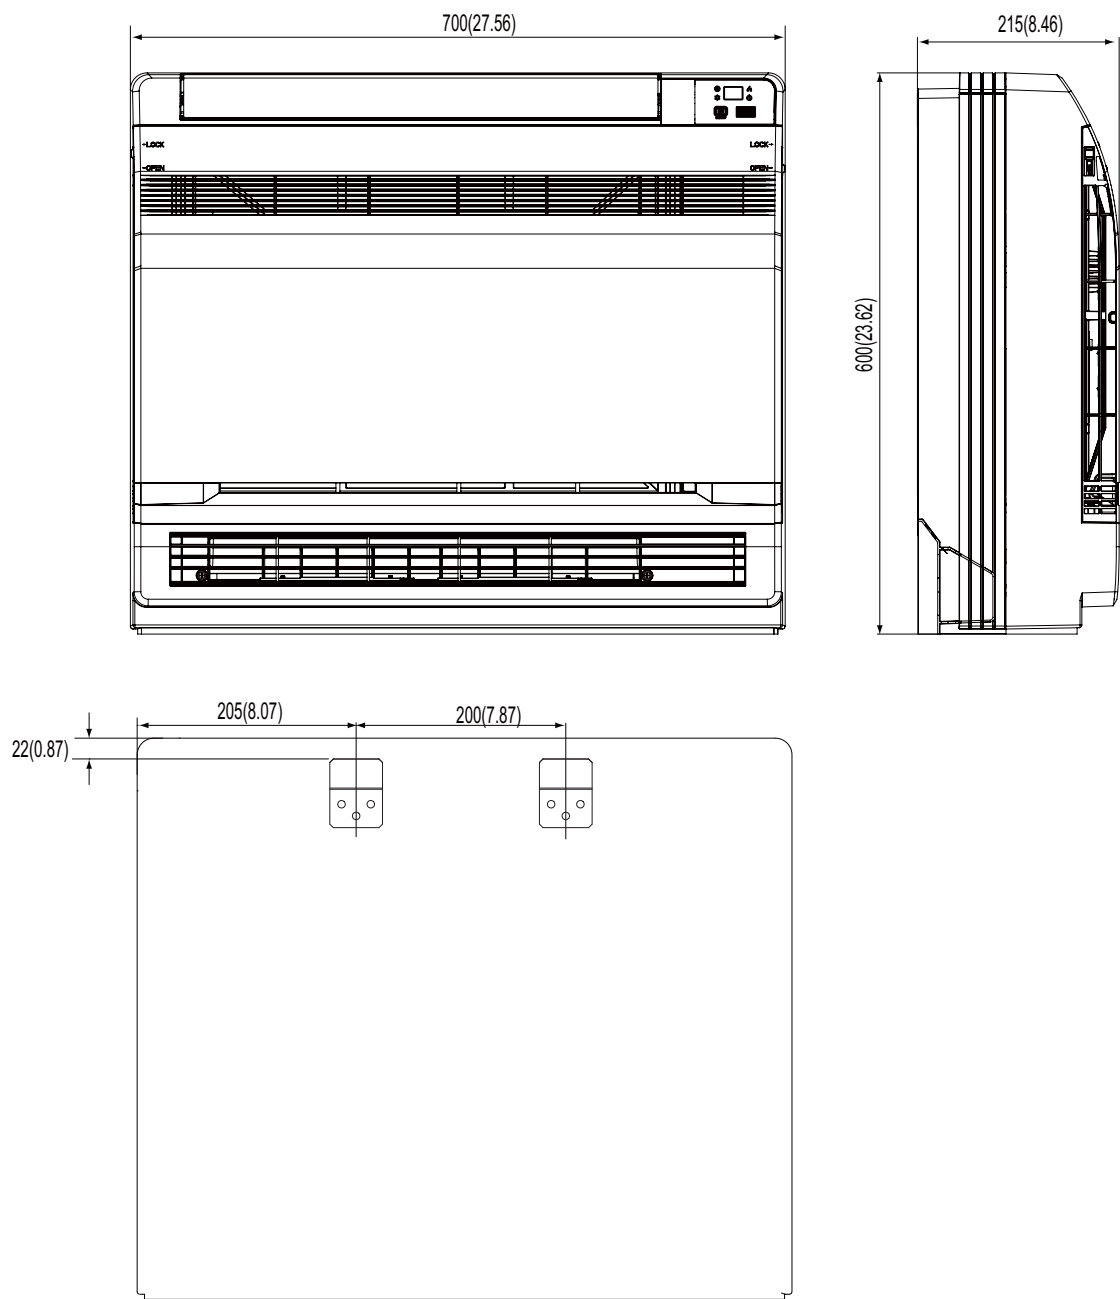

Unit:mm(inch)