




Ducted IDU

GEH(09)AA-D3DNA1C/I

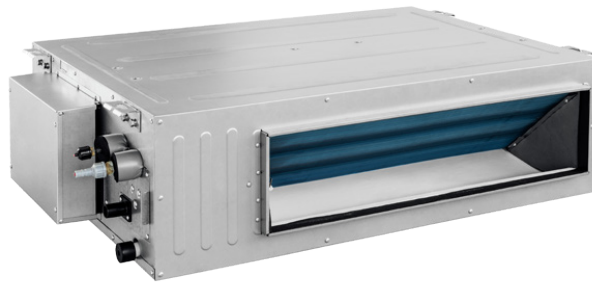

Model	Heat pump		GFH(09)EA-D3DNA1 A/I
Capacity	Cooling	Btu/h	8500
	Heating	Btu/h	9500
Power supply		V-Ph-Hz	208/230-1-60
Motor power input		kW	0.075
Air flow volume		m³/h	450
		CFM	265
Sound pressure level(H/L)		dB(A)	37/31
Fan motor	Output	kW	0.04
	Running current	A	0.35
Connecting pipe	Gas	inch	3/8" (Φ9.52mm)
	Liquid	inch	1/4" (Φ6.35mm)
	Connection method		Screw thread connection
Drain pipe	External dia.	mm	Φ26
	Thickness	mm	1.0
Outline dimension	W × D × H	mm	700 × 615 × 200
Package dimension	W × D × H	mm	893 × 743 × 305
Net weight		kg	22
Gross weight		kg	27
Loading quantity		20' GP	108
		40' GP	234
		40' HQ	234


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Construction Views.

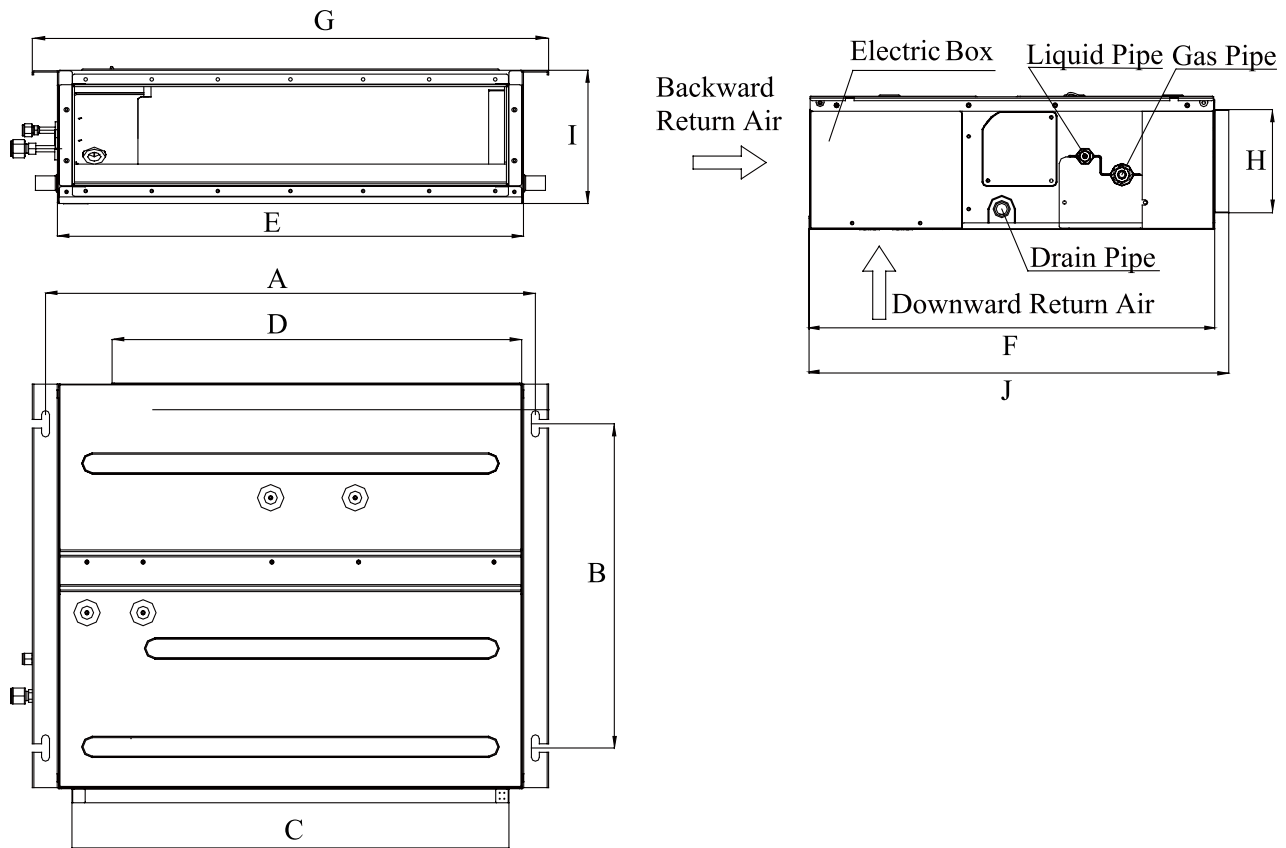


Unit:mm(inch)

Model \ Item	A	B	C	D	E	F	G	H	I	J
GFH(09)EA-D3DNA1A/I	742 (29.21)	491 (19.33)	662 (26.06)	620 (24.41)	700 (27.56)	615 (24.21)	782 (30.79)	156 (6.14)	200 (7.87)	635 (25.00)

Ducted IDU

GFH(12)EA-D3DNA1A/I

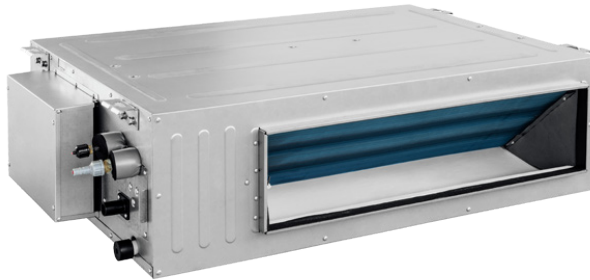

Model	Heat pump		GFH(12)EA-D3DNA1A/I
Capacity	Cooling	Btu/h	11900
	Heating	Btu/h	13100
Power supply		V-Ph-Hz	208/230-1-60
Motor power input		kW	0.065
Air flow volume		m³/h	500
		CFM	294
Sound pressure level(H/L)		dB(A)	39/32
Fan motor	Output	kW	0.049
	Running current	A	0.35
Connecting pipe	Gas	inch	3/8"(Φ9.52mm)
	Liquid	inch	1/4"(Φ6.35mm)
	Connection method		Screw thread connection
Drain pipe	External dia.	mm	Φ26
	Thickness	mm	1.0
Outline dimension	W × D × H	mm	700 × 615 × 200
Package dimension	W × D × H	mm	893 × 743 × 305
Net weight		kg	23
Gross weight		kg	29
Loading quantity		20'GP	108
		40' GP	234
		40' HQ	234


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Construction Views.

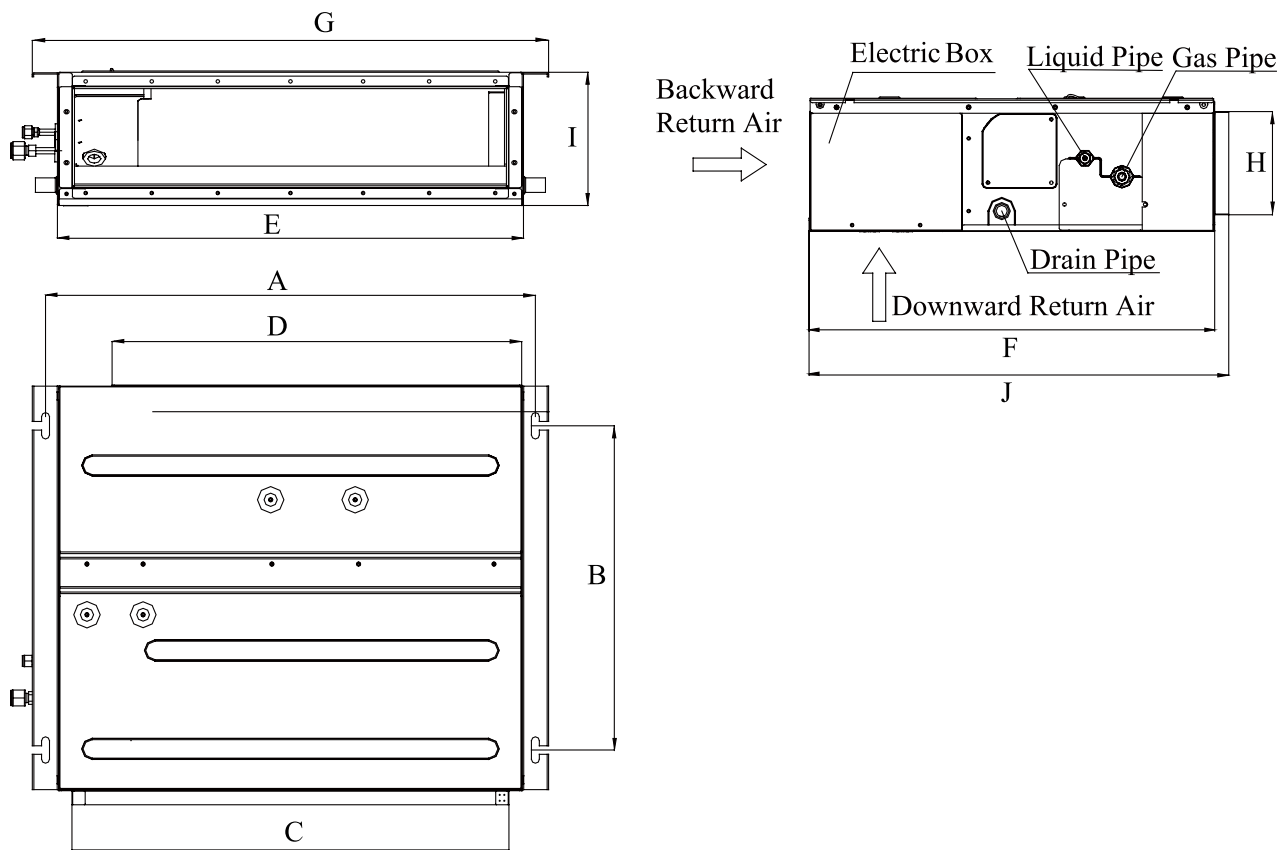

Unit:mm(inch)

Model \ Item	A	B	C	D	E	F	G	H	I	J
GFH(12)EA-D3DNA1A/I	742 (29.21)	491 (19.33)	662 (26.06)	620 (24.41)	700 (27.56)	615 (24.21)	782 (30.79)	156 (6.14)	200 (7.87)	635 (25.00)

Job Name:


Schedule Reference:

Date:

Specification are subject to change without notice.

Ducted IDU

GFH(18)EA-D3DNA1A/I

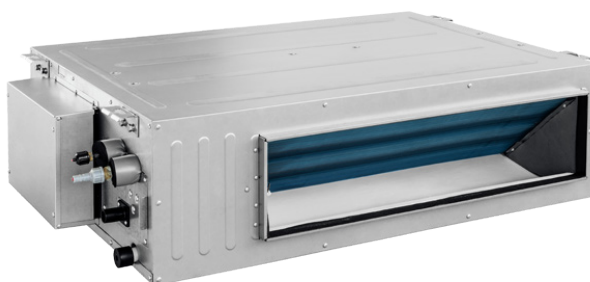

Model	Heat pump		GFH(18)EA-D3DNA1A/I
Capacity	Cooling	Btu/h	15300
	Heating	Btu/h	18700
Power supply		V-Ph-Hz	208/230-1-60
Motor power input		kW	0.08
Air flow volume		m³/h	700
		CFM	412
Sound pressure level(H/L)		dB(A)	41/33
Fan motor	Output	kW	0.075
	Running current	A	0.43
Connecting pipe	Gas	inch	1/2"(Φ12.7mm)
	Liquid	inch	1/4"(Φ6.35mm)
	Connection method		Screw thread connection
Drain pipe	External dia.	mm	Φ26
	Thickness	mm	1.0
Outline dimension	W × D × H	mm	900 × 615 × 200
Package dimension	W × D × H	mm	1120 × 743 × 305
Net weight		kg	27
Gross weight		kg	36
Loading quantity		20'GP	90
		40' GP	192
		40' HQ	192


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Construction Views.

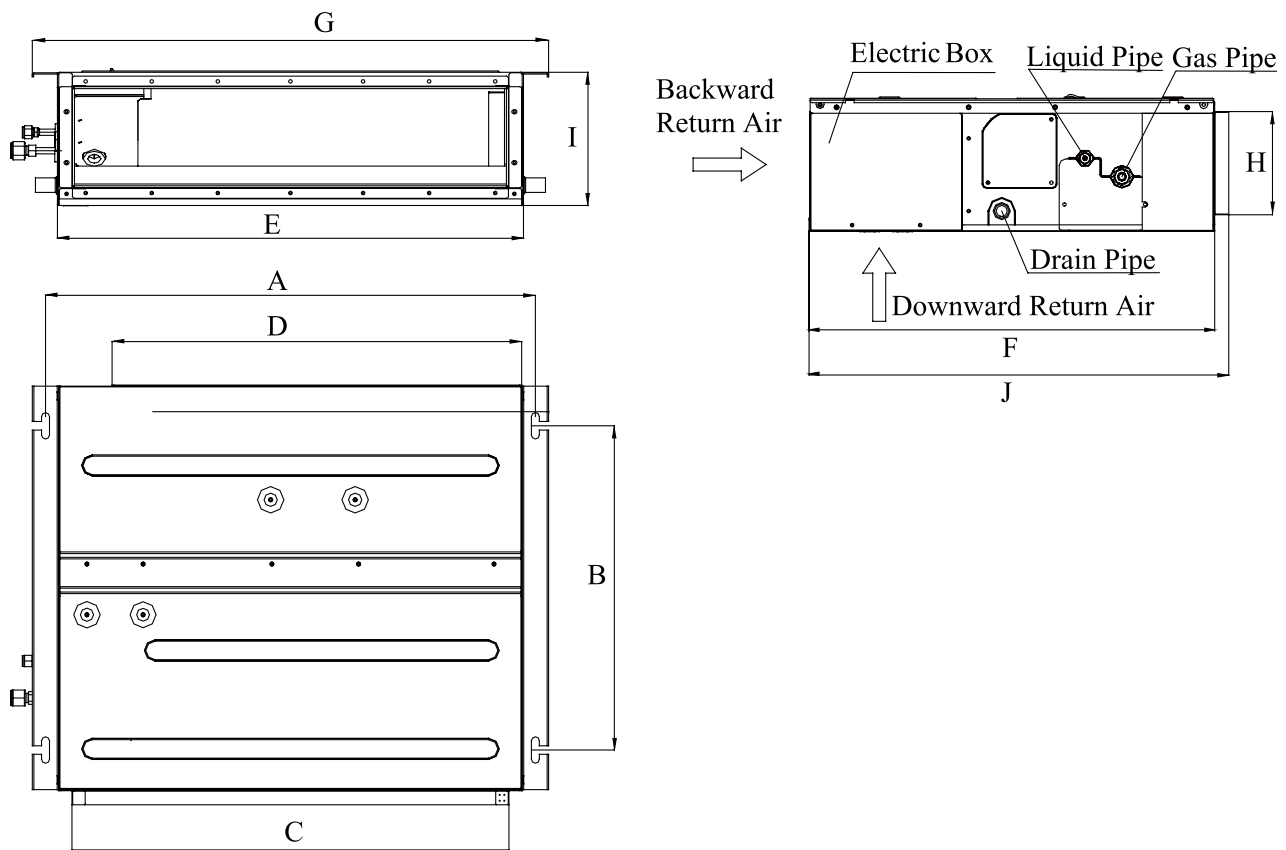

Unit:mm(inch)

Model \ Item	A	B	C	D	E	F	G	H	I	J
GFH(18)EA-D3DNA1A/I	942 (37.09)	491 (19.33)	862 (33.94)	820 (32.28)	900 (35.43)	615 (24.21)	982 (38.66)	156 (6.14)	200 (7.87)	635 (25.00)

Job Name:


Schedule Reference:

Date:

Specification are subject to change without notice.

Ducted IDU

GFH(21)EA-D3DNA1A/I

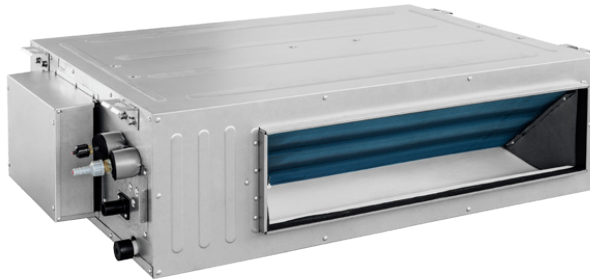

Model	Heat pump		GFH(21)EA-D3DNA1A/I
Capacity	Cooling	Btu/h	20400
	Heating	Btu/h	22600
Power supply		V-Ph-Hz	208/230-1-60
Motor power input		kW	0.11
Air flow volume		m³/h	1000
		CFM	589
Sound pressure level(H/L)		dB(A)	42/34
Fan motor	Output	kW	0.0225
	Running current	A	0.54
Connecting pipe	Gas	inch	5/8"(Φ15.9mm)
	Liquid	inch	3/8"(Φ9.52mm)
	Connection method		Screw thread connection
Drain pipe	External dia.	mm	Φ26
	Thickness	mm	1.0
Outline dimension	W × D × H	mm	1100 × 615 × 200
Package dimension	W × D × H	mm	1323 × 743 × 305
Net weight		kg	31
Gross weight		kg	41
Loading quantity		20'GP	72
		40' GP	162
		40' HQ	162


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Construction Views.

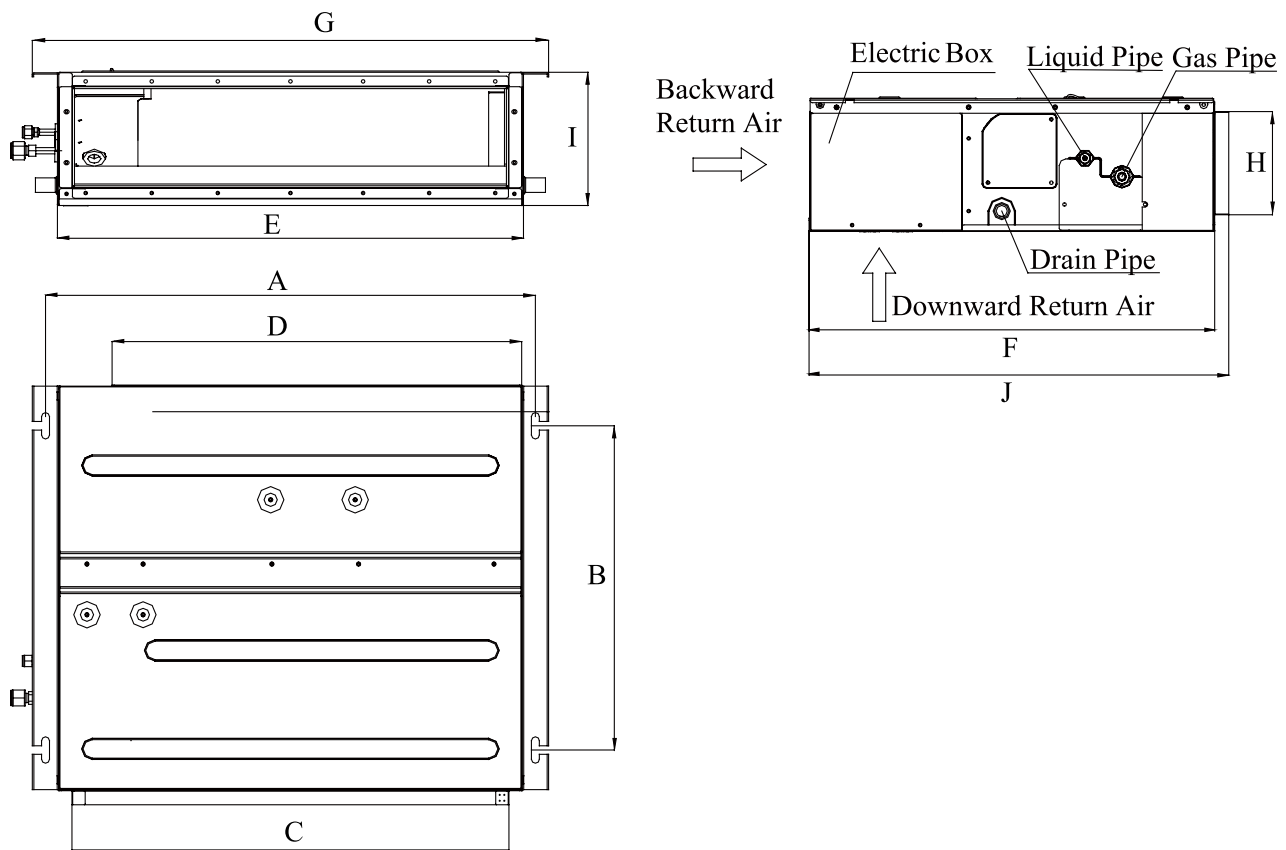


Unit:mm(inch)

Model \ Item	A	B	C	D	E	F	G	H	I	J
GFH(21)EA-D3DNA1A/I	1142 (44.96)	491 (19.33)	1062 (41.81)	1020 (40.16)	1100 (43.31)	1182 (46.54)	782 (30.79)	156 (6.14)	200 (7.87)	635 (25.00)

Ducted IDU

GFH(24)EA-D3DNA1A/I

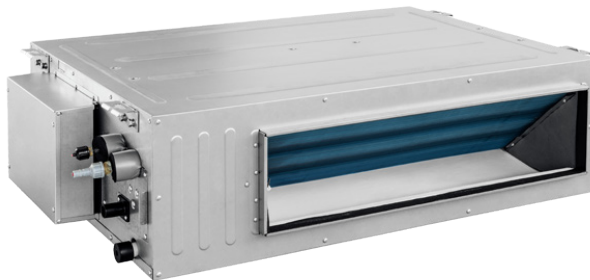

Model	Heat pump		GFH(24)EA-D3DNA1A/I
Capacity	Cooling	Btu/h	23800
	Heating	Btu/h	27400
Power supply		V-Ph-Hz	208/230-1-60
Motor power input		kW	0.11
Air flow volume		m³/h	1000
		CFM	589
Sound pressure level(H/L)		dB(A)	42/34
Fan motor	Output	kW	0.0225
	Running current	A	0.54
Connecting pipe	Gas	inch	5/8"(Φ15.9mm)
	Liquid	inch	3/8"(Φ9.52mm)
	Connection method		Screw thread connection
Drain pipe	External dia.	mm	Φ26
	Thickness	mm	1.0
Outline dimension	W × D × H	mm	1100 × 615 × 200
Package dimension	W × D × H	mm	1323 × 743 × 305
Net weight		kg	31
Gross weight		kg	41
Loading quantity		20'GP	72
		40' GP	162
		40' HQ	162


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Construction Views.

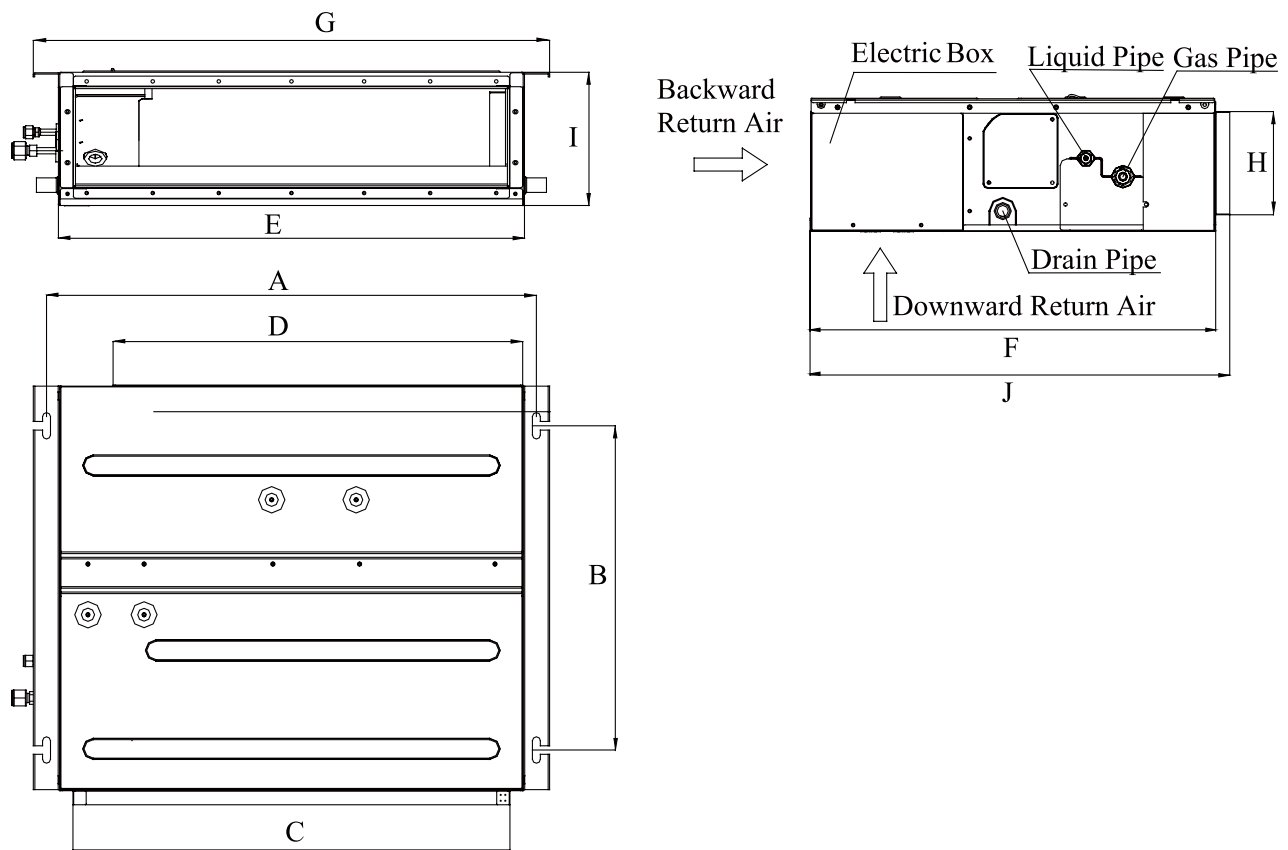

Unit:mm(inch)

Model \ Item	A	B	C	D	E	F	G	H	I	J
GFH(24)EA-D3DNA1A/I	1142 (44.96)	491 (19.33)	1062 (41.81)	1020 (40.16)	1100 (43.31)	1182 (46.54)	782 (30.79)	156 (6.14)	200 (7.87)	635 (25.00)